


SCHRUPPSCHEIBEN GRINDING DISCS


Außen-Ø Outer Ø	Innen-Ø Inner Ø	Dicke Thickness	Form Shape	Max. Drehzahl Max. Speed	Anwendung Application	Korn Grain	Typ Type	Artikel-Nr. Item No.	Inhalt Content
Ø 58 mm	Ø 9,6 mm (5/8")	3 mm	Gekröpft Depressed center	19.000 min ⁻¹	Stahl Steel	46	RS58-46	12110051	5 Stk./ pcs.
						60	RS58-60	12110052	5 Stk./ pcs.
						80	RS58-80	12110053	10 Stk./ pcs.
						100	RS58-100	12110054	5 Stk./ pcs.
						120	RS58-120	12110055	5 Stk./ pcs.

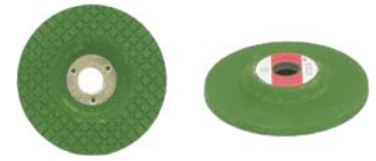

Außen-Ø Outer Ø	Innen-Ø Inner Ø	Dicke Thickness	Form Shape	Max. Drehzahl Max. Speed	Anwendung Application	Typ Type	Artikel-Nr. Item No.
Ø 100 mm	Ø 16 mm	6 mm	Gekröpft Depressed center	15.300 min ⁻¹	Stahl Steel	RS100-S	12180031
					Stahl Steel	RS115-S	12180010
Ø 115 mm	Ø 22 mm	6 mm	Gekröpft Depressed center	13.300 min ⁻¹	Edelstahl Stainless Steel	RS115-E	12180011
					Aluminium	RS115-A	12180012
					Stahl Steel	RS125-S	12199101
Ø 125 mm	Ø 22 mm	6 mm	Gekröpft Depressed center	12.200 min ⁻¹	Edelstahl Stainless Steel	RS125-E	12199102
					Aluminium	RS125-A	12199103
					Stahl Steel	RS150-S	12199111
Ø 150 mm	Ø 22 mm	6 mm	Gekröpft Depressed center	10.200 min ⁻¹	Stahl Steel	RS180-S	12199121
					Edelstahl Stainless Steel	RS180-E	12199122
Ø 180 mm	Ø 22 mm	6 mm	Gekröpft Depressed center	8.500 min ⁻¹	Aluminium	RS180-A	12199123
					Stahl Steel	RS230-S	12199131
					Edelstahl Stainless Steel	RS230-E	12199132